


IMB-M45H


Industrial ATX Motherboard with 8th/9th Gen Intel® Core™ i7/i5/i3 Processor

Features

- 8th/9th Gen Intel® Core™ i7/i5/i3 processors support, compatible with Windows® 10
- Up to 64 GB Dual-channel DDR4 2666 MHz (based on CPU)
- Unique power design to ensure stable USB power of 5V ±5%

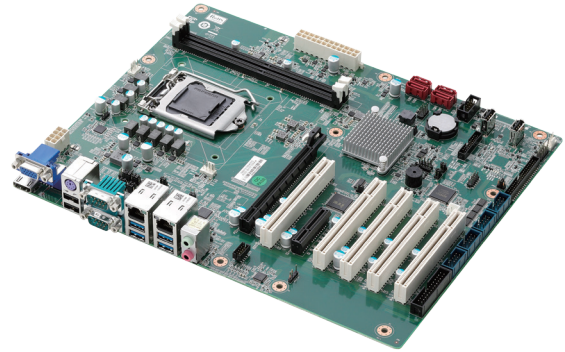

Product Illustration

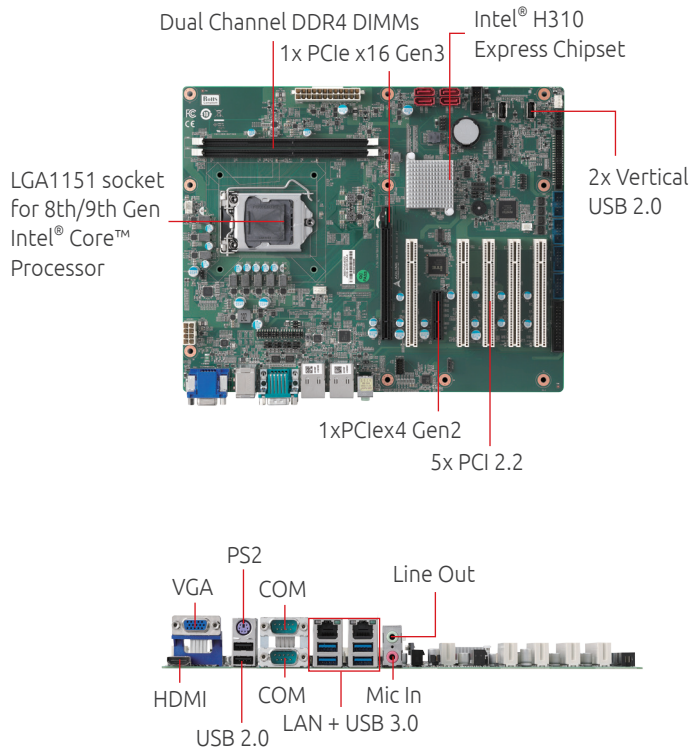

Ordering Information

- **IMB-M45H**
 ATX Intel® Core™ i7/i5/i3 industrial motherboard
 Note: CPU, Memory module and Cooler kit are not included

Packing Lists

- IMB-M45H
- IMB-M45H I/O shield

Optional Accessories

- **USB 2.0 Cable**
 2-port USB 2.0 port cable with bracket
- **LPT Cable**
 1-port LPT port cable with bracket
- **COM Cable**
 2-port COM port cable with bracket
- **2U CPU Cooler**

Specifications

Processor System	
CPU	Intel® Core™ i7-9700E, 2.6GHz, 12M Cache, 65W TDP, LGA1151, DDR4 2666MHz support (8C/8T)
	Intel® Core™ i7-9700TE, 1.8GHz, 12M Cache, 35W TDP, LGA1151, DDR4 2666MHz support (8C/8T)
	Intel® Core™ i5-9500E, 3.0GHz, 9M Cache, 65W TDP, LGA1151, DDR4 2666MHz support (6C/6T)
	Intel® Core™ i5-9500TE, 2.2GHz, 9M Cache, 35W TDP, LGA1151, DDR4 2666MHz support (6C/6T)
	Intel® Core™ i3-9100E, 3.1GHz, 6M Cache, 65W TDP, LGA1151, DDR4 2400MHz support (4C/4T)
	Intel® Core™ i3-9100TE, 2.2GHz, 6M Cache, 35W TDP, LGA1151, DDR4 2400MHz support (4C/4T)
	Intel® Core™ i7-8700, 3.2GHz, 12M Cache, 65W TDP, LGA1151, DDR4 2666MHz support (6C/12T)
	Intel® Core™ i7-8700T, 2.4GHz 12M Cache, 35W TDP, LGA1151, DDR4 2666MHz support (6C/12T)
	Intel® Core™ i5-8500, 3.0GHz, 9M Cache, 65W TDP, LGA1151, DDR4 2666MHz support (6C/6T)
	Intel® Core™ i5-8500T, 2.1GHz, 9M Cache, 35W TDP, LGA1151, DDR4 2666MHz support (6C/6T)
	Intel® Core™ i3-8100, 3.6GHz, 6M Cache, 65W TDP, LGA1151, DDR4 2400MHz support (4C/4T)
	Intel® Core™ i3-8100T, 3.1GHz, 6M Cache, 35W TDP, LGA1151, DDR4 2400MHz support (4C/4T)
	Intel® Pentium® G5400, 3.7GHz, 4M Cache, 58W TDP, LGA1151, DDR4 2400MHz support (2C/4T)
	Intel® Pentium® G5400T, 3.1GHz, 4M Cache, 35W TDP, LGA1151, DDR4 2400MHz support (2C/4T)
	Intel® Celeron® G4900, 3.1GHz, 2M Cache, 54W TDP, LGA1151, DDR4 2400MHz support (2C/2T)
	Intel® Celeron® G4900T, 2.9GHz, 2M Cache, 35W TDP, LGA1151, DDR4 2400MHz support (2C/2T)
	Chipset
Memory	Two 288 PIN DDR4 Sockets (vertical type) Dual channel DDR4 2400/2666 MHz, up to 64 GB (based on CPU)
BIOS	AMI® UEFI BIOS, 128 Mb SPI Flash Memory
Watchdog Timer	software programmable and can be generate system reset
Hardware Monitor	CPU voltage
	+3.3 V voltage
	+5 V voltage
	+12 V voltage
	CPU temperature
	System temperature
	CPU fan speed
	System fan speed
Operating Systems	Microsoft® Windows® 10 64bit OpenSUSE Leap 15.1 64bit Fedora 30 64bit Ubuntu 18.10 LTS 64bit
I/O Interfaces	
Serial ATA	4x SATA 6.0 Gb/s connectors
USB	4x USB 3.0 connectors (rear)
	2x USB 2.0 connectors (rear)
	2x USB 2.0 pin headers 2x USB 2.0 (vertical type A connector)
Serial Ports	2x RS-232/422/485 with auto flow control connector (rear) 4x RS-232 pin headers
Expansion slots	1xPCIe x16 Gen3 1xPCIe x4 Gen2 5x PCI 2.2
Parallel Port	1x LPT pin header
PS2 Combo Port	1x PS/2 keyboard & Mouse connector (rear)
DIO	2x 20-pin/2.0mm GPIO pin header: 16 in and 16 out, one ground pin and one power pin (5V/12V/no power, jumper selected)
Audio	
Audio Codec	Realtek® ALC892
Interface	1x Mic-in and 1x Line-out connector (rear)
Graphics	
Graphics Engine	Integrated Intel® HD Graphics series (based on CPU)
VGA	1x VGA connector (rear), resolution up to 1920 x 1200 @ 60 Hz
HDMI 1.4	1x HDMI connector (rear) resolution up to 4096 x 2160 @ 24 Hz
Ethernet	
Controller	LAN1: Intel® I219-LM via RJ45 connector (rear) LAN2: Intel® I211-AT via RJ45 connector (rear)
Wake On LAN	LAN1 and LAN2 support
Mechanical and Environmental	
Form Factor	ATX
Dimension	305 mm x 244 mm (W x L)
Operating Temperature	0 °C to 60 °C
Storage Temperature	-40 °C to 85 °C
Relative Humidity	40° C @ 95% RH Non-condensing
Certification (EMC)	CE & FCC Class B

*Other Linux Distribution support by request